

pco.edge 4.2 bi

cooled sCMOS camera

bi back
illuminated

up to 95%
quantum efficiency

deep cooled
down to -25 °C

compact
design

resolution
2048 x 2048 pixel
with 6.5 µm pixel size

back illuminated
sCMOS sensor

input windows
selectable



1288 
EMVA Standard Compliant

pco.

» sCMOS image sensor

type of sensor	backside illuminated scientific CMOS (bi sCMOS) monochrome
resolution (h x v)	2048 x 2048 active pixel
pixel size (h x v)	6.5 µm x 6.5 µm
sensor format / diagonal	13.3 mm x 13.3 mm / 18.8 mm
shutter mode	rolling shutter (RS)
MTF	76.9 lp/mm (theoretical)
fullwell capacity	48 000 e ⁻
readout noise (typ.)¹	1.8 med e ⁻ / 1.9 rms e ⁻
dynamic range (typ.)	26 667 : 1 up to 88.5 dB
quantum efficiency	up to 95 %
spectral range	370 nm ... 1100 nm 190 nm ... 1100 nm UV version
dark current (typ.)	0.2 e ⁻ /pixel/s @ -25 °C sensor temperature
DSNU	0.9 rms e ⁻
PRNU	1.2 %

» camera system

frame rate	40 fps @ full resolution
exposure / shutter time	10 µs .. 20 s
dynamic range A/D²	16 bit
A/D conversion factor	0.8 e ⁻ /DN
pixel scan rate	46.0 MHz
pixel data rate	184.0 Mpixel/s
binning horizontal	x1, x2, x4
binning vertical	x1, x2, x4
region of interest (ROI)	horizontal: steps of 32 pixels vertical: steps of 8 pixels
non linearity	< 0.6 %
cooling method	adjustable: from -25 °C to +20 °C peltier with forced air (fan) and water cooling calibration setpoint: -10 °C
trigger input signals	frame trigger, acquire (SMA connectors)
trigger output signals	exposure, busy (SMA connectors)
data interface	USB 3.1 Gen 1
time stamp	in image (1 µs resolution)

¹ The readout noise values are given as median (med) and root mean square (rms) values, due to the different noise models, which can be used for evaluation.

² The high dynamic signal is simultaneously converted at high and low gain by two 12 bit A/D converters and the two 12 bit values are sophisticatedly merged into one 16 bit value.



» general


power delivery	power over USB 3.1 Gen 1 and power connector (24 VDC +/- 10 %)
power consumption	typ. 4.5 W over USB 3.1 Gen 1 and typ. 10.0 W (max. 22.0 W) over power connector
weight	920 g
operating temperature	+ 10 °C ... + 40 °C
operating humidity range	10 % ... 80 % (non-condensing)
storage temperature range	- 10 °C ... + 60 °C
optical interface	F-mount, C-mount
CE / FCC certified	yes

» frame rate table


2048 x 2048	40 fps
2048 x 1024	80 fps
2048 x 512	159 fps
2048 x 256	300 fps
2048 x 128	520 fps
1920 x 1080	76 fps
1600 x 1200	68 fps
1280 x 1024	80 fps
640 x 480	170 fps
320 x 240	317 fps



selectable
input windows
available




UV+ input window VIS+

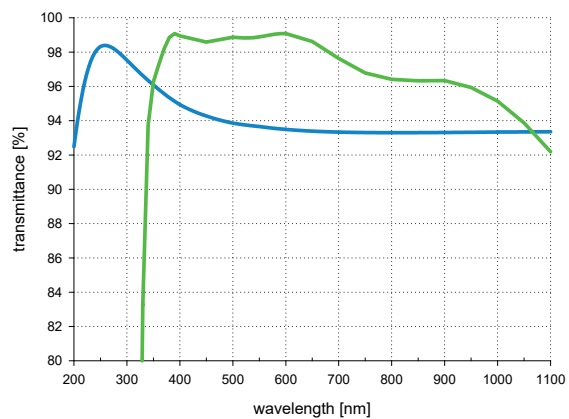


»

sensor

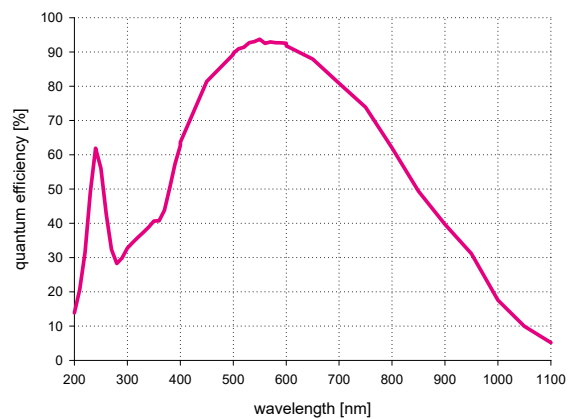


»

pco.edge 4.2 bi UV camera pco.edge 4.2 bi

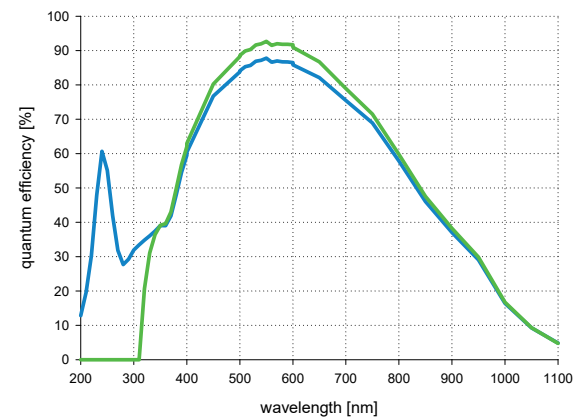

» dimensions

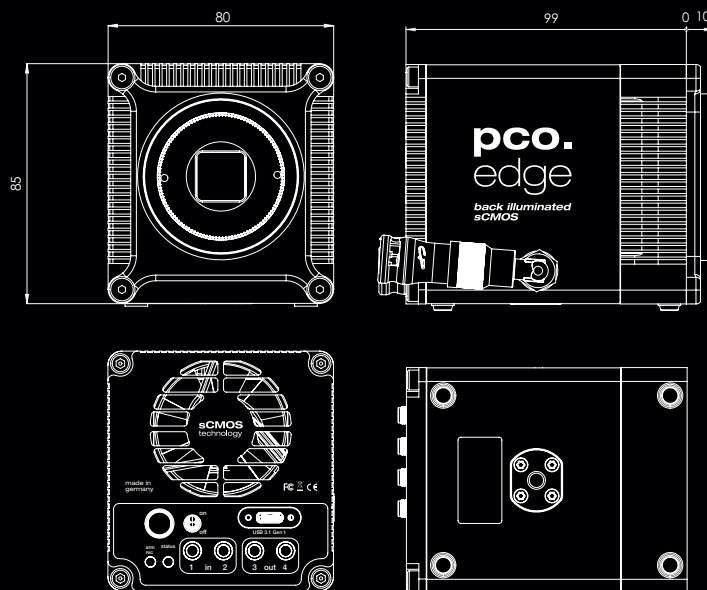

F-mount and C-mount lens adapter are changeable. All dimensions are given in millimeter.

» camera view



» applications

brightfield microscopy | fluorescence microscopy | digital pathology | single molecule localization microscopy | lightsheet fluorescence microscopy (LSFM) | calcium imaging | FRET | FRAP | structured illumination microscopy (SIM) | high-speed bright field ratio imaging | high throughput screening | high content screening | biochip reading | TIRF microscopy | spinning disk confocal microscopy | 3D metrology | ophthalmology | photovoltaic inspection | industrial quality inspection | lucky astronomy | bio luminescence | chemo luminescence

» software



With pco.camware you control all camera settings, the image acquisition and the storage of your image data. The pco.sdk is the complementary software development kit. It includes dynamic link libraries for user customization and integration on Windows-PC platforms. Drivers for popular third party software packages are also available for you.

All this items like pco.camware, pco.sdk and third party drivers, are free-to-download at www.pco.de.

» third party integrations



find us

europa

PCO AG
Donaupark 11
93309 Kelheim, Germany

+49 9441 2005 50
info@pco.de
pco.de

america

PCO-TECH Inc.
6930 Metroplex Drive
Romulus, Michigan 48174, USA

+1 248 276 8820
info@pco-tech.com
pco-tech.com

asia

PCO Imaging Asia Pte.
3 Temasek Ave
Centennial Tower, Level 34
Singapore, 039190

+65 6549 7054
info@pco-imaging.com
pco-imaging.com

china

Suzhou PCO Imaging Technology Co., Ltd.
Room A10, 4th Floor, Building 4
Ascendas Xinsu Square, No. 5 Xingnan Street
Suzhou Industrial Park, China 215021

+86 512 67634643
info@pco.cn
pco.cn



for application stories
please visit our website

pco.

subject to changes without prior notice | lens is sold separately
©PCO AG, Kelheim | pco.edge 4.2 bi data sheet | v1.03



ISO 9001:2015