

Kepler CMOS Camera

KL6060 FI

6K x 6K with 10 micron pixels

The very large imaging area of the KL6060 FI scientific CMOS camera provides high sensitivity with low noise, even at multiple frames per second. The camera offers 4x the area of comparably priced 2K x 2K back illuminated CCD cameras.


Technical Data

Sensor Type	Front Illuminated CMOS
Sensor	GPixel GSense6060 FI
Shutter Type	Rolling
Active Pixels	6144 x 6144
Pixel Size (microns)	10 x 10 μm
Imaging Area (Diagonal)	61.4 X 61.4 mm (86.8 mm)
Full Well Capacity	135000 electrons
Typical Readout Noise	4.2 e-
Dynamic Range	89.8 dB
Frame Rate	19 fps (QSFP)
Cooling Method ¹	Air and Liquid
Max. Cooling (Air)	45°C below ambient
Temperature Stability	0.1°C
Dark Current (typical)	0.07 eps at -20C
Interface	USB 3.0 (Optional QSFP ²)
Data Bit Depth	16 bit ³
Optional Shutter	90mm
Optional Mounts	Medium Format Recommended (6x7)
Subarray Readout	Standard
External Trigger In/Out	Standard
SDK / Software	Kepler SDK / FLI Pilot
Weight	8.1 lbs (3.6 kg)

¹ Liquid circulation connectors sold separately



² QSFP = Quad Small Form factor Pluggable: high speed fiber optic interface

³ 16-bit data merged from two 12 bit converters

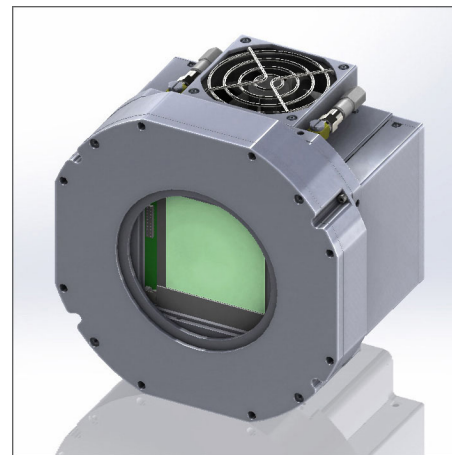

Also available with 90mm shutter

Absolute Quantum Efficiency

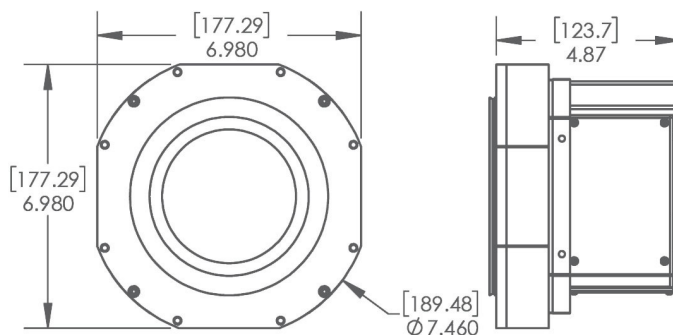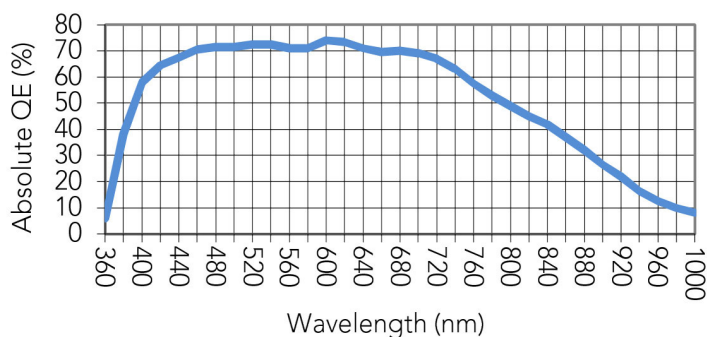

See www.flicamera.com for alternate configurations